# 

# **Scissor Lift** PTH 50 Series

# **Elevate Comfort** and Productivity

### Crown's PTH 50S/PS hand pallet truck with manual or powered scissor lift improves operator comfort and efficiency by avoiding unnecessary bending and lifting that can cause strains and stresses on the body.


- Use as a hand pallet truck and mobile work positioner
- Handle skids and open-bottom containers
- Transport loads, use as a worktable and feed printing or punch presses, as well as conveyors







## **Technical Information**

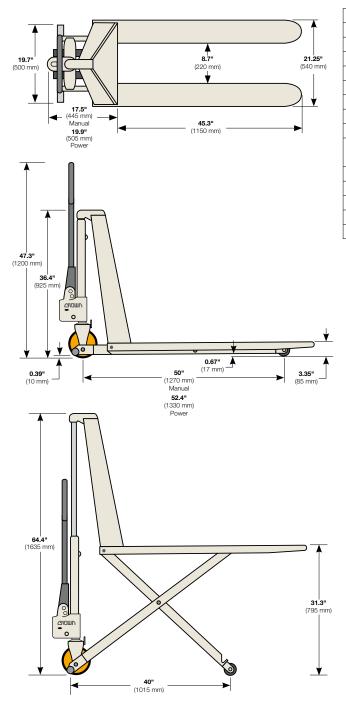

|                     |         |        | Imperial                    | Metric     | Imperial | Metric          |          |
|---------------------|---------|--------|-----------------------------|------------|----------|-----------------|----------|
| Manufacturer        |         |        | Crown Equipment Corporation |            |          |                 |          |
| Scissor Lift Model  |         |        |                             | PTH50S     |          | PTH50PS-1       |          |
| Power, Hydraulic    |         |        |                             | Manual     |          | Manual/Electric |          |
| Load Capacity       |         | lb     | kg                          | 2200       | 1000     | 2200            | 1000     |
| Load Center         |         | in     | mm                          | 23.6       | 600      | 23.6            | 600      |
| Fork Length         |         | in     | mm                          | 45.3       | 1150     | 45.3            | 1150     |
| Overall Length      |         | in     | mm                          | 62.8       | 1595     | 65.2            | 1655     |
| Outside Fork Spread |         | in     | mm                          | 21.25      | 540      | 21.25           | 540      |
| Fork Width          |         | in     | mm                          | 6.3        | 160      | 6.3             | 160      |
| Fork Height         | Lowered | in     | mm                          | 3.35       | 85       | 3.35            | 85       |
|                     | Raised  | in     | mm                          | 31.3       | 795      | 31.3            | 795      |
| Steer Angle         |         | degree |                             | 200        |          | 200             |          |
| Ground Clearance    |         | in     | mm                          | 0.67       | 17       | 0.67            | 17       |
| Poly Steer Wheels   |         | in     | mm                          | 7.1 x 2.0  | 180 x 50 | 7.1 x 2.0       | 180 x 50 |
| Poly Load Wheels    | Single  | in     | mm                          | 2.9 x 2.95 | 74 x 75  | 2.9 x 2.95      | 74 x 75  |
| Truck Weight        |         | lb     | kg                          | 348        | 158      | 429             | 195      |

### Standard Features

#### **Control Handle**

- Ergonomic handle features optimal thickness and angled shape for fatigue-free operation
- Three position control lever (raise, lower and neutral) is easily actuated with one finger

#### Handling

• Two hundred degree steer angle for manuevering in tight areas

#### **Frame and Fork Assembly**

- One-piece formed C-channel steel, reinforced forks for maximum strength and longer life
- Heavy-duty, solid steel scissor legs

#### **Operator Safety and Control**

 Two stabilizer supports disengage the steer wheels at a lift height of approximately 15" (400 mm) to help prevent unexpected truck movement

#### Manual Hydraulic System (PTH50S)

- Manual actuation of hydraulic lift using the handle
- Single-piece cast pump with serviceable valve cartridge
- Overload bypass valve prevents lifting of loads beyond the rated capacity
- Top-of-stroke bypass protects the hydraulic system and extends the life of the system components
- Hard-chrome ram and piston improve service life and minimize rust

#### Electric Powered Hydraulic System (PTH50PS-1)

- Fast and quiet height adjustment at the press of a button
- Ideal for applications requiring frequently varied working heights
- Maintenance-free battery, cycle and vibration safe, 12 volt/60Ah
- Discharge indicator with lift cut-out to prevent full discharge
- On-board charger, 12 volt/10 amps
- All manual lifting and lowering functions are retained

# 

### **Crown Equipment Corporation**

New Bremen, Ohio 45869 USA Tel 419-629-2311 Fax 419-629-3796 crown.com

Because Crown is continually improving its products, specifications are subject to change without notice.

Crown, the Crown logo, the color beige, the Momentum Mark and ecologic are trademarks of Crown Equipment Corporation.

Copyright 2013-2015 Crown Equipment Corporation SF18992 Rev. 01-16 Printed in U.S.A.